

# ENTRY SERIES

## MF I 700-M I PLUS



## I . INFORMATION

### I . I DESCRIPTION

MF1700-M1 PLUS pneumatic lift heat-assist roll laminator with new design ABS cover. This basic level automatic machine that can handle demanding job runs, its performance surpass the requirements of Printers and Finishers offering stand lamination service within a reasonable budget.

### I . 2 SPECIFICATION

Max width	1630mm	Up and down	Pneumatic
Max thickness	28mm	Heating method	Infrared
Max speed	9m/min	Warm up time	5-10 min
Max temp	60℃	Roller type	Silicon
Volt	110/220v	Diameter of roller	120mm
N.W.	150kgs	Power	1200w
G.W.	205kgs	Dimension(LWH)	2200x860x750mm


## 1.3 UNIQUE FUNCTIONS



### Roll shaft

Patented new roll shaft can flip over when loading media.


Also it provides possibility exchangeable with each other, with auto-locked.

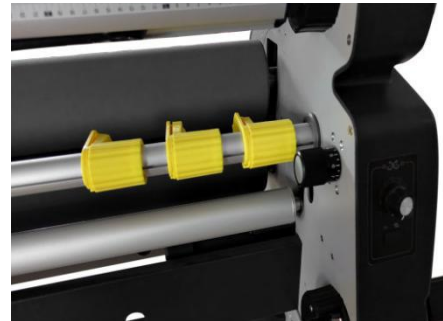

### Adjustable trimmer

The tungsten safety trimmers can use over 20000m.

With the adjustable function, you can easily follow the cutting edges.

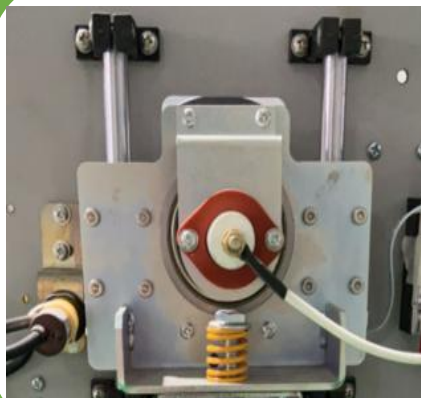

### Two rails lifting

Its two rails lifting track ensures more smooth and durable lifting.



### Rear speed controller

You may supervise the lamination starting by adjust the rear speed controller.



### Anti-static string

Anti-static string can eliminate most static during fast lamination.



### Tension grip

Its tension knobs can be easily adjust to provide proper tension according to different medias.



### Media tension

A: You can adjust the tension screw to generate extra tension for prints, keep the media in flat.